



Vertical intermittent-motion cartoner

- ▣ Quick format changeover – 15 min.
- ▣ Low maintenance
- ▣ Mechanical design
- ▣ Electrical supply: 230 V single phase, 16 A, 50 Hz + Earth
- ▣ Compressed air supply: 500 NL/min. at 6 bar
- ▣ Weight: 800 kg


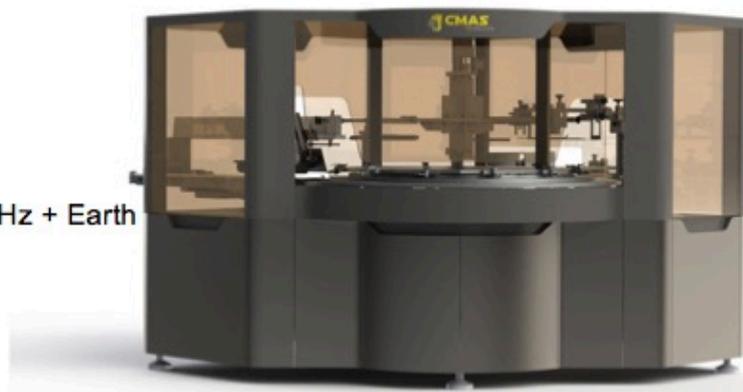


Photo non contractuelle




For cartons

- ▣ Standard tuck closures
- ▣ Reverse tuck closures
- ▣ Adhesive closures



Fast toolless adjustment

- ▣ Digital positioning indicators
- ▣ CMAS patented conveyors

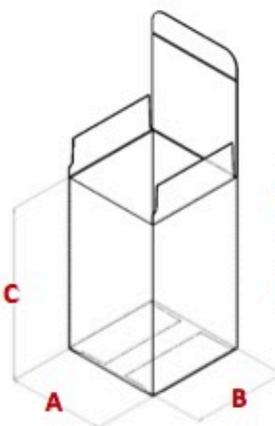


	MIN. mm	MAX. mm	Output P/min.
A	50	180	
B	20	110	0/50
C	75	300	



Options

- ▣ Set of 12 adjustable buckets
- ▣ Automatic mechanical or robotic feed
- ▣ Prefolded leaflet inserter
- ▣ Coupling with counters – dosing units – bagging units
- ▣ Camera control with auto reject of non-compliant cartons
- ▣ Friction fit top closure system
- ▣ Output conveyor
- ▣ Accumulator table
- ▣ Labelling by embossing or inkjet
- ▣ Casters for portability



1977

